

# GLOBE VALVES

## GLOBE VALVE 200 WOG




### FEATURES


- INVESTMENT CAST COMPONENTS
- INSIDE SCREW NON-RISING STEM DESIGN
- SCREWED BONNET, CONICAL SEAT DESIGN
- FOR FOOD, GENERAL CHEMICAL AND INDUSTRIAL APPLICATION
- ASTM ASME B16.34 API 598 EN 10213 EN 12516 EN 12266  
ANSI B1.20.1 (NPT) ISO 228-1 DIN 2999 BS21 (BSPP) BS21 (BSPT) ISO 7-1
- END CONNECTION: THREADED ENDS / SW ENDS
- WORKING PRESSURE: 200 PSI / 16 BAR (CWP)
- TEMPERATURE RANGE: -4 TO 356 °F (-20 TO 180°C)
- PRESSURE TEST ACCORDING TO API 598 OR EN 12266

### MATERIAL LIST

No.	PART NAME	MATERIAL
1	BODY	CF8M
2	DISC	SS316
3	STEM	SS316
4	BONNET	CF8M
5	GASKET PACKING	TEFLON
6	WASHER	SS304
7	STEM PACKING	TEFLON
8	GLAND	SS304
9	GLAND NUT	SS316
10	HANDLE WHEEL	MICO STEEL
11	NAME PLATE	ALUMINIUM
12	HANDLE WHEEL WASHER	SS304
13	HANDLE WHEEL NUT	SS304

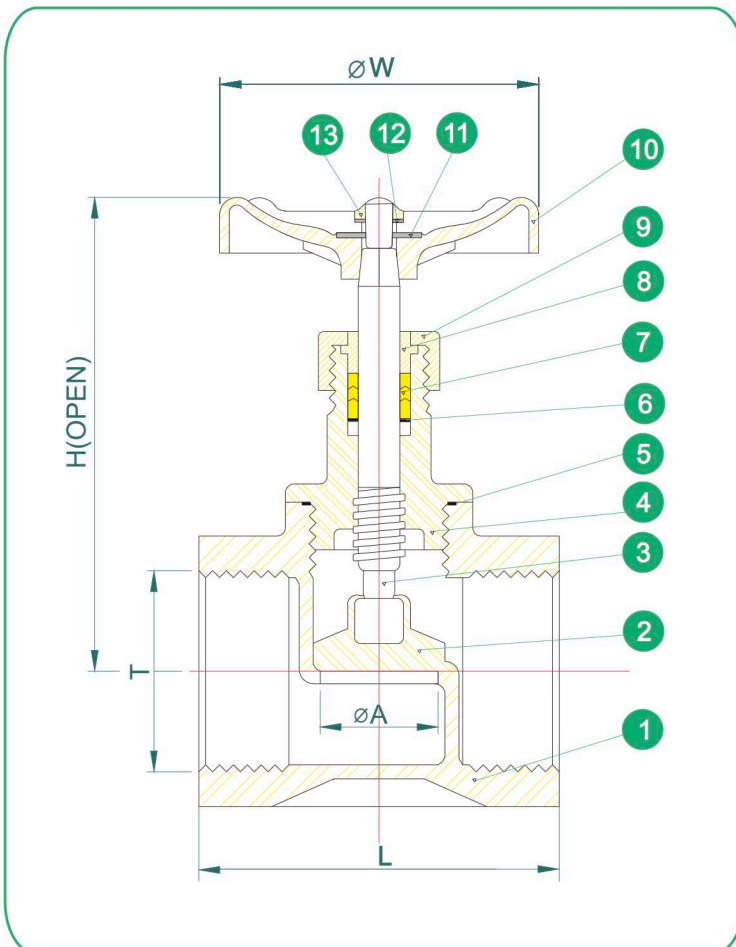

### PRESSURE-TEMPERATURE CHART

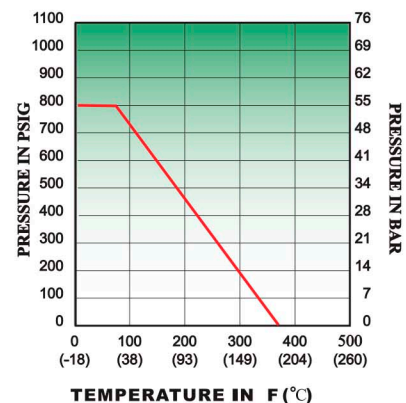

### DIMENSION (INCHES)

SIZE	ØA	L	H	ØW	T	WEIGHT (LBS)
1/4"	0.43	2.05	3.50	2.24	1/4" NPT.PF	0.59
3/8"	0.43	2.05	3.50	2.24	3/8" NPT.PF	0.57
1/2"	0.47	2.05	3.50	2.24	1/2" NPT.PF	0.62
3/4"	0.59	2.36	3.82	2.76	3/4" NPT.PF	0.88
1"	0.79	2.83	4.21	3.15	1" NPT.PF	1.32
1 1/4"	0.98	3.15	4.92	3.54	1 1/4" NPT.PF	1.87
1 1/2"	1.26	3.58	5.51	3.54	1 1/2" NPT.PF	2.64
2"	1.50	3.98	6.50	3.94	2" NPT.PF	3.74



# GLOBE VALVES

## GLOBE VALVE 200 WOG

### HOW TO ORDER

CLASS	VALVE BODY DESIGN (SERIES)	MATERIAL			ENDS	SIZE
		BODY	TRIM	SEAT		
<b>NONE</b> 200# WOG	<b>6</b> GLOBE NON RISING STEM	<b>3</b> CF8M	<b>3</b> 316SS	<b>3</b> CF8M	<b>T</b> THREADED	<b>0.25</b> 1/4"
						<b>0.38</b> 3/8"
						<b>0.5</b> 1/2"
						<b>0.75</b> 3/4"
						<b>1</b> 1"
						<b>01.25</b> 1 1/4"
						<b>01.5</b> 1 1/2"
<b>02</b> 2"						
					<b>S</b> Socket Weld	

#### Example

Globe Valve, Body ASTM A 351 Gr CF8M & Disc 316SS ,Metat to Metal Seat, Threaded 200#WOG, Size 2".

**6333T02**

(1) Aplicable for Valve type 6Y Only

